

DATASHEET



ELECTRICAL SPECIFICATIONS:


Frequency range	10 MHz - 67 GHz
Impedance	50 Ω
VSWR	1.50 (max.)
Insertion loss	0.90 dB (max.)
Avg. Input power	1.5 W max. @ 25 °C
Voltage rating	60 V
Operating temp. range	-55 / +100 °C
Connector type	1.85mm male - 1.85mm female

MATERIAL SPECIFICATIONS:

	Materials	Finishes
Body	Stainless steel	Passivated
Center contact	BeCu	Gold plating



Unit: mm

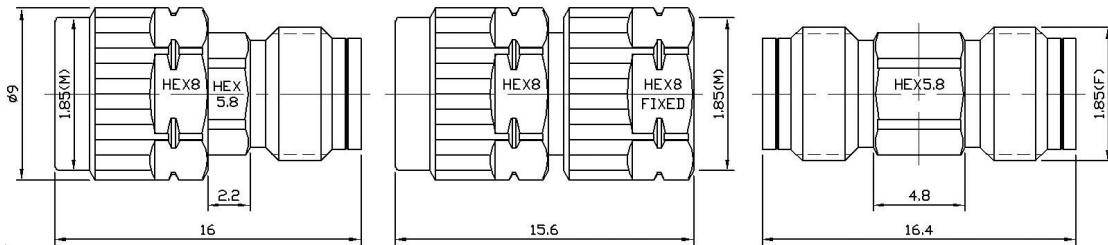

P/N: DCB-185A60-67

P/N: DCB-185B60-67

P/N: DCB-185C60-67

Typical performance graph

